


AQUAFAN: AF-1/75

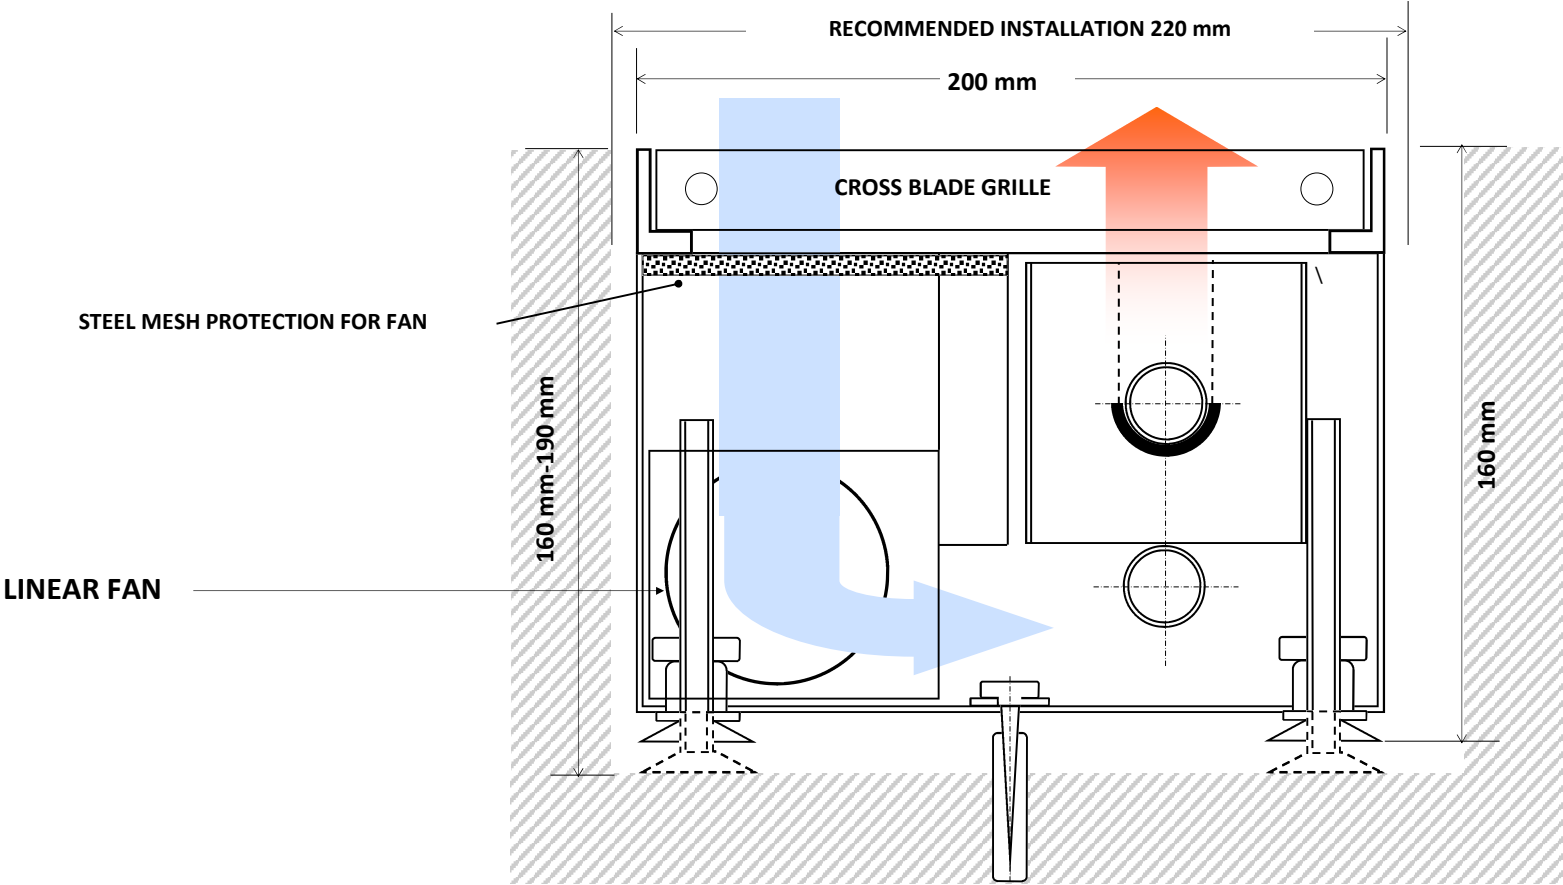

SPECIFICATION

MOTORISED VALVE

FLEXIBLE HOSE CONNECTORS

SIEMENS CONTROLLER

ANY LENGTH AND WIDTH BEYOND THE ABOVE DIMENSIONS CAN BE ACCOMMODATED

230 V SUPPLY

24 V DC FAN MOTOR

SAFETY CUT OUTS

WALL MOUNTED CONTROL

TEMPERATURE CONTROLLED

CROSS SECTION

Calculation for ΔT = mean water temperature less entering air temperature. Example: $\Delta T = 82 + 72 - 20 = 57$ Deg C

2


PROJECT REFERENCE	
GRILLE	Natural Satin Anodised Aluminium
ANGLE	Natural Satin Anodised Aluminium
FINNED ELEMENT BANK	1 Qty: 75 mm x 75 mm
PIPE	22 mm Ø COPPER
TRENCH: WIDTH x HEIGHT	200 mm x 160 mm

PERCENTAGE OF FAN CAPACITY	OUTPUT AT 20ΔT (WATTS)	OUTPUT AT 30ΔT (WATTS)	OUTPUT AT 40ΔT (WATTS)	OUTPUT AT 50ΔT (WATTS)	OUTPUT AT 60ΔT (WATTS)	OUTPUT AT 70ΔT (WATTS)
HIGH	501	759	1019	1282	1545	1811
MEDIUM	385	587	790	995	1202	1410
LOW	279	428	579	732	889	1044




DUCT ENGINEERING (LUTON) LTD
Unit E, Cradock Road Ind Est, Luton,
Bedfordshire, LU4 0JF.
Phone: 0044 (0) 1525 562626
Email: sales@ductengineering.co.uk

AQUAFAN: AF-1/75

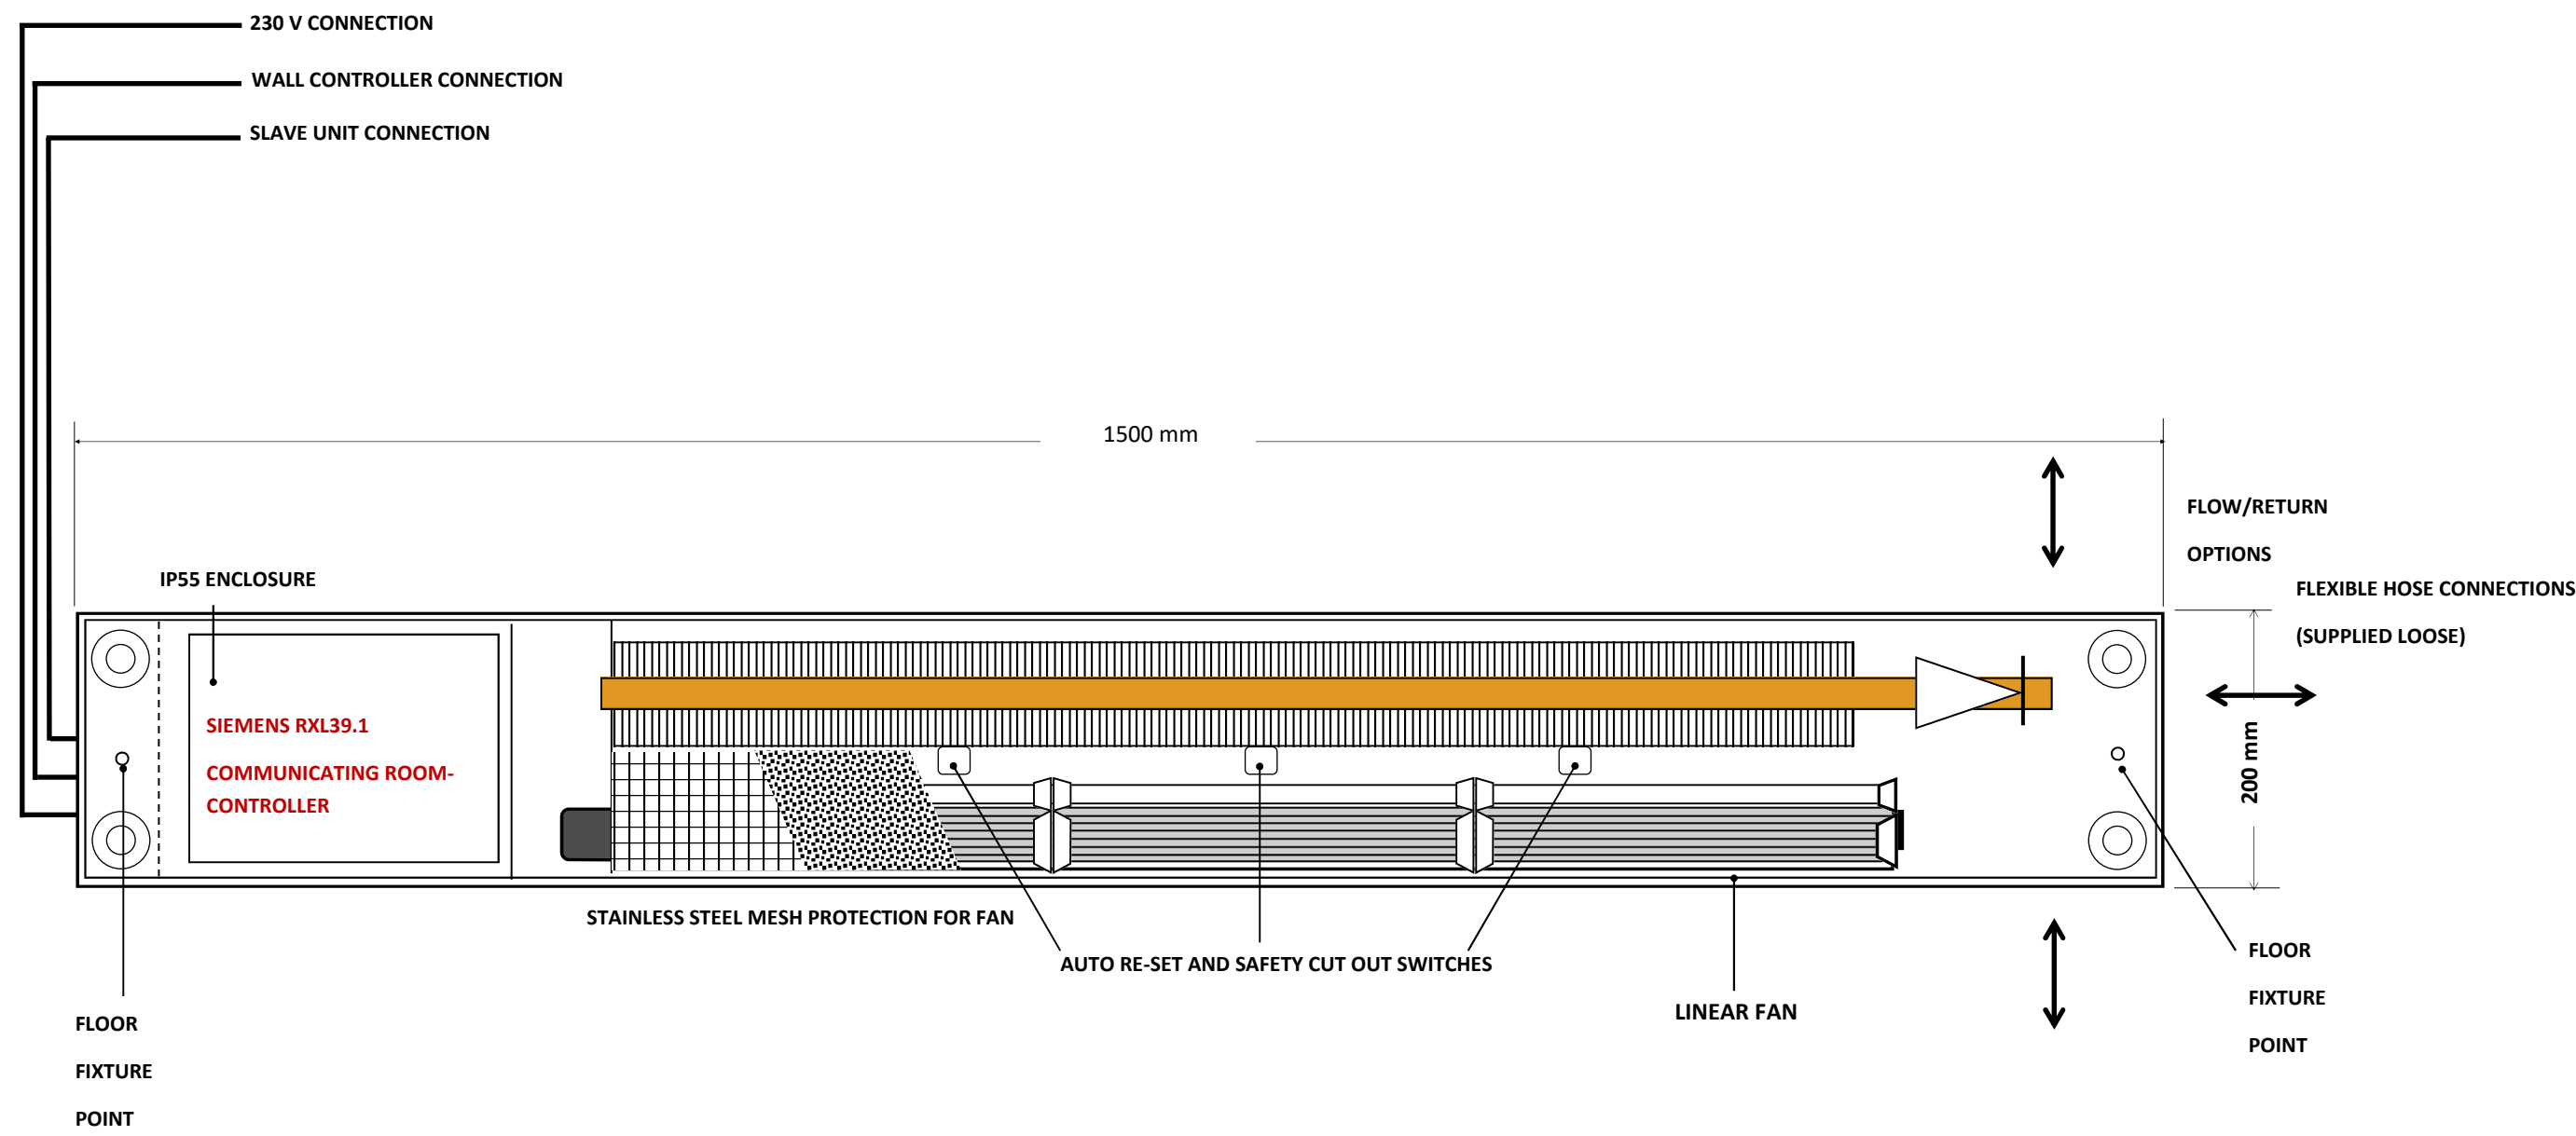


MASTER CONTROL UNIT




DUCT ENGINEERING (LUTON) LTD
Unit E, Cradock Road Ind Est, Luton,
Bedfordshire, LU4 0JF.
Phone: 0044 (0) 1525 562626
Email: sales@ductengineering.co.uk

AQUAFAN: AF-1/75

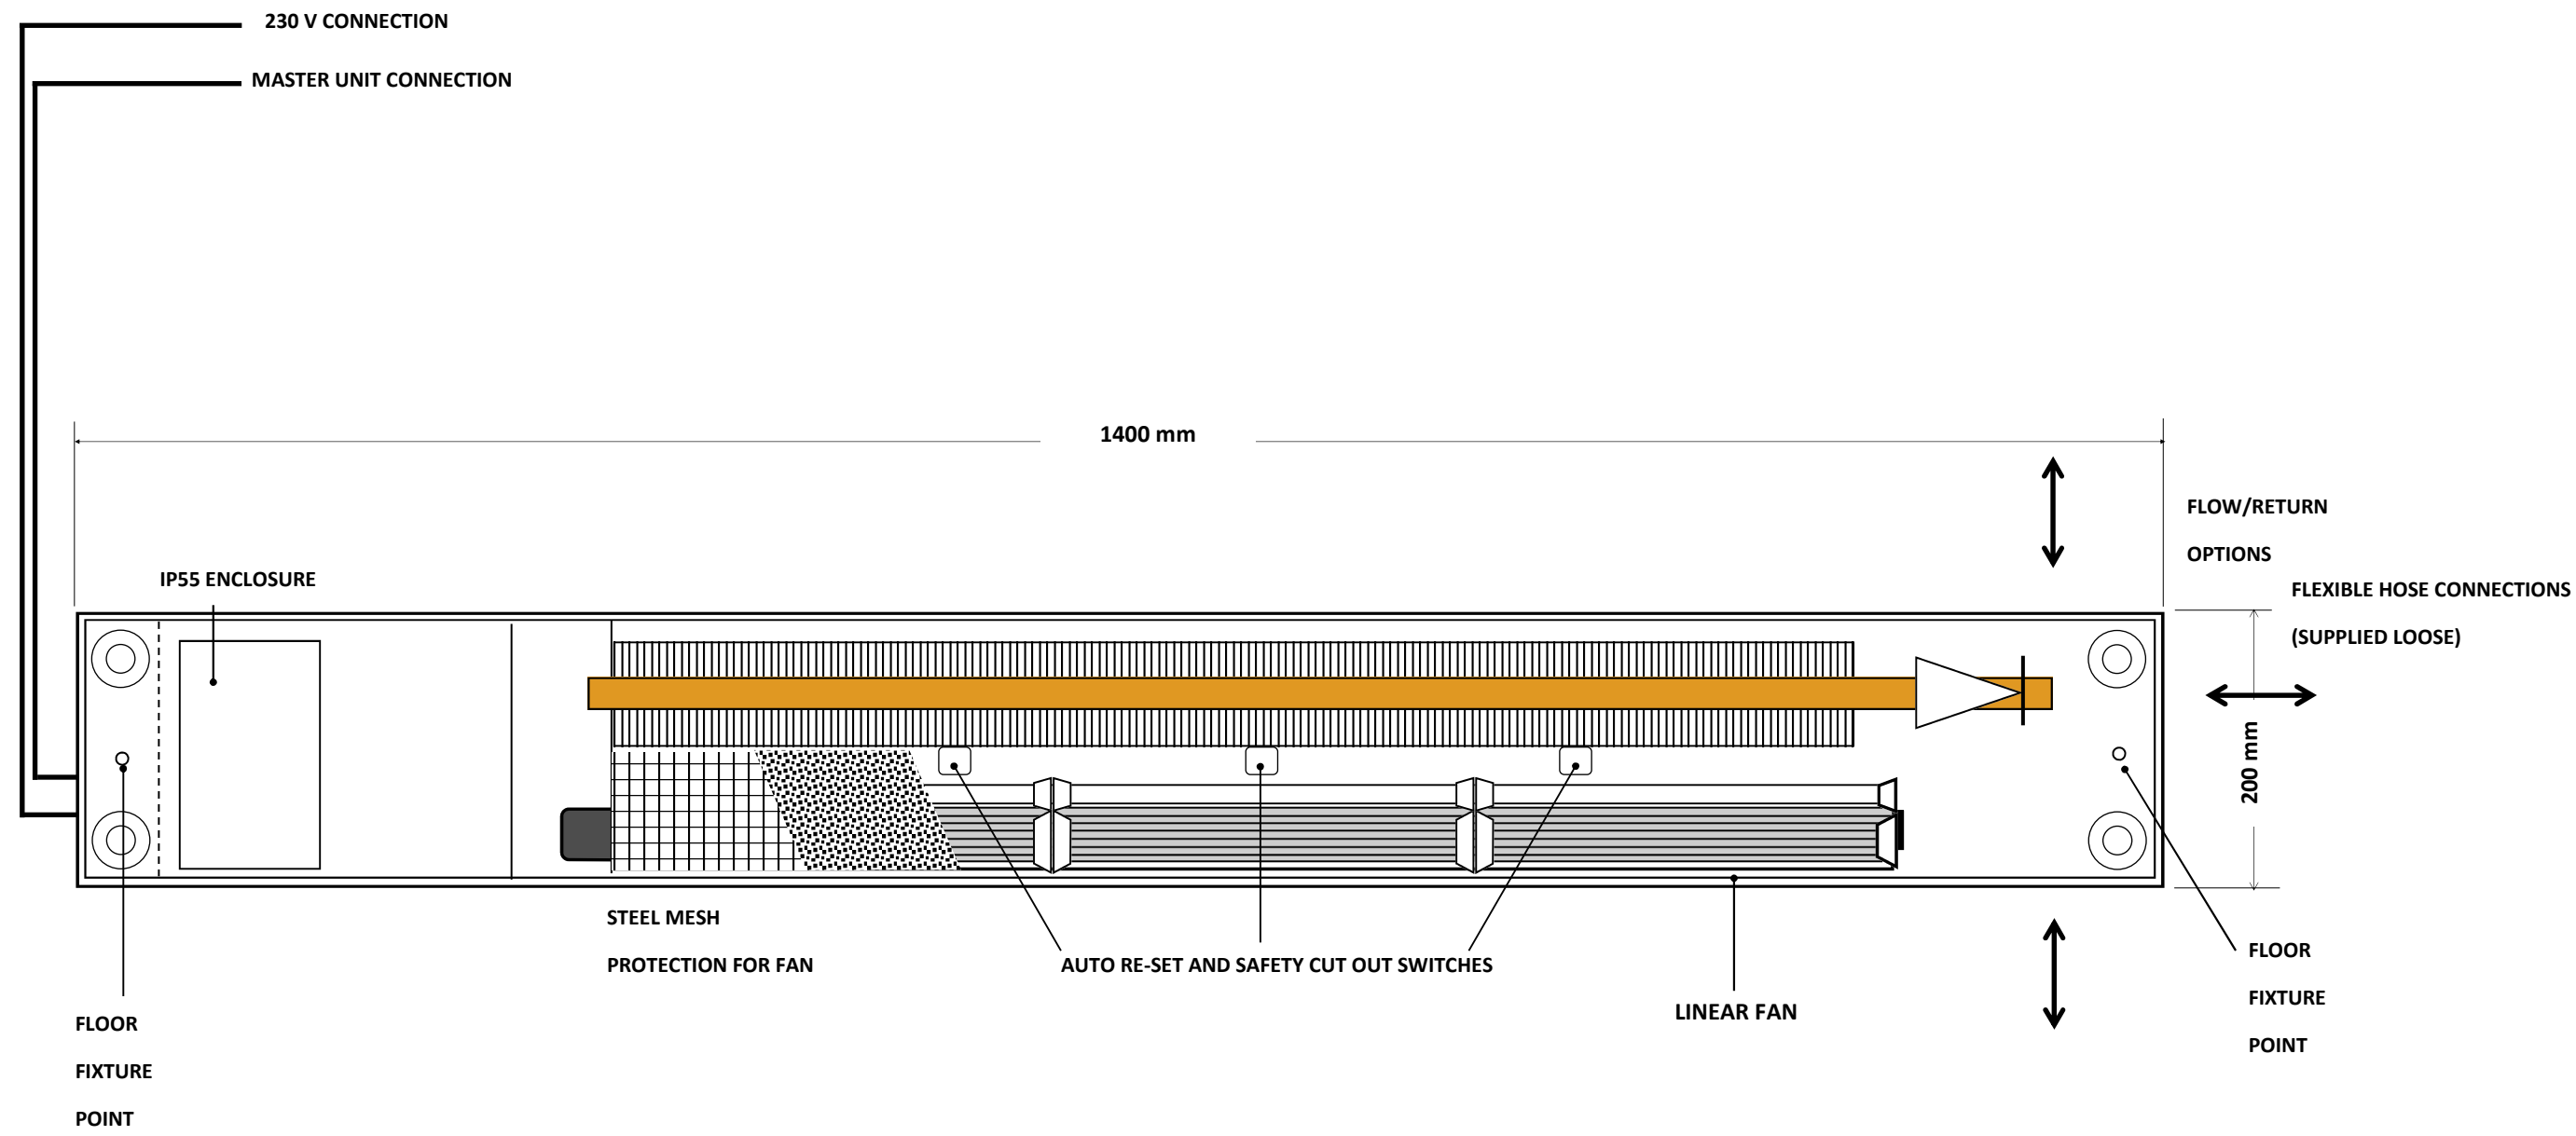

SLAVE UNIT



DUCT ENGINEERING (LUTON) LTD
Unit E, Cradock Road Ind Est, Luton,
Bedfordshire, LU4 0JF.
Phone: 0044 (0) 1525 562626
Email: sales@ductengineering.co.uk